

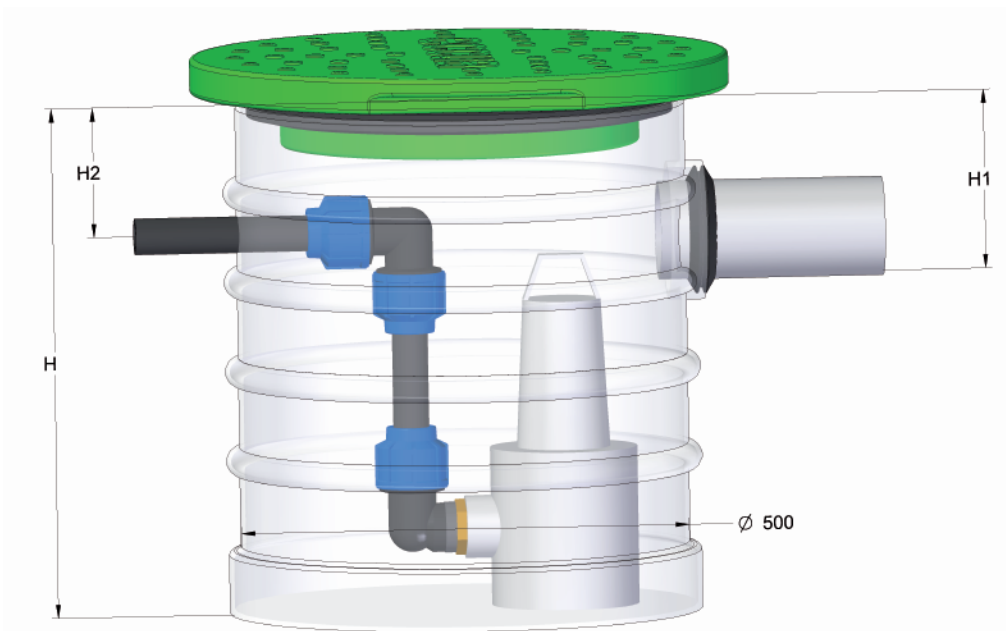
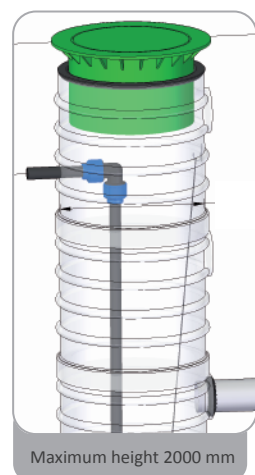



# JUKU



## OPTIONS



Small pumping station „JUKU“ is intended for wastewater and stormwater lifting. Pumping station „JUKU“ is suitable to use in small septic and wastewater treatment plants to lift water. „JUKU“ is small, simple and with affordable price.

### SPECIFICATION:

- Cast Ø: 500 mm
- Height H (with cover): H500..2000 mm
- Inside pipes Ø: PE d32
- Useful volume: 110-330 l
- Inlet pipes Ø : 110 mm
- 1 pump
- Telescopic plastic cover (max. 600 mm)

Inside „JUKU“ pumping stations we recommend you to use Flygt DX and SX serie pumps.

Product symbols:

- DX – serie name (wastewater- and drainage pumps)
- DXV – Vortex impeller
- DXG – grinder pumps
- Flygt SX – serie name (stormwater,-and drainage pumps)
- SXV – Vortex impeller

	Pump model	Rated power kW	Max head m	Max delivery l/min	1-phase	3-phase	Delivery port
Drainage pumps	SX 2	0,25	7	145	230V	x	1¼"
	SXV 3	0,5	7	175	230V	400V	1¼"
	SX 3	0,5	11	225	230V	400V	1¼"
	SX 5	0,5	10	275	230V	400V	1½"
	SX 7	0,7	15	350	230V	400V	1½"
	SX 11	1,1	17	375	230V	400V	1½"
	SX 15	1,5	21	410	x	400V	1½"
Wastewater pumps	DX 35-5	0,55	10,5	300	230V	400V	1½"
	DX 50-7	0,75	10,25	540	230V	400V	2"
	DX 50-11	1,1	12,8	615	230V	400V	2"
	DX 50-15	1,5	14,5	700	x	400V	2"
Wastewater pumps with Vortex impeller	DXV 35-5	0,55	9	300	230V	400V	1½"
	DXV 50-7	0,75	7,7	540	230V	400V	2"
	DXV 50-11	1,1	9	615	230V	400V	2"
	DXV 50-15	1,5	11,2	700	x	400V	2"
Grinder pumps	DXG 25-11	1,1	24	138	230v	400V	1"
	DXGM 25-11	1,1	24	138	230v	400V	1"

